



MASTIC[®]
by  **Ply Gem**

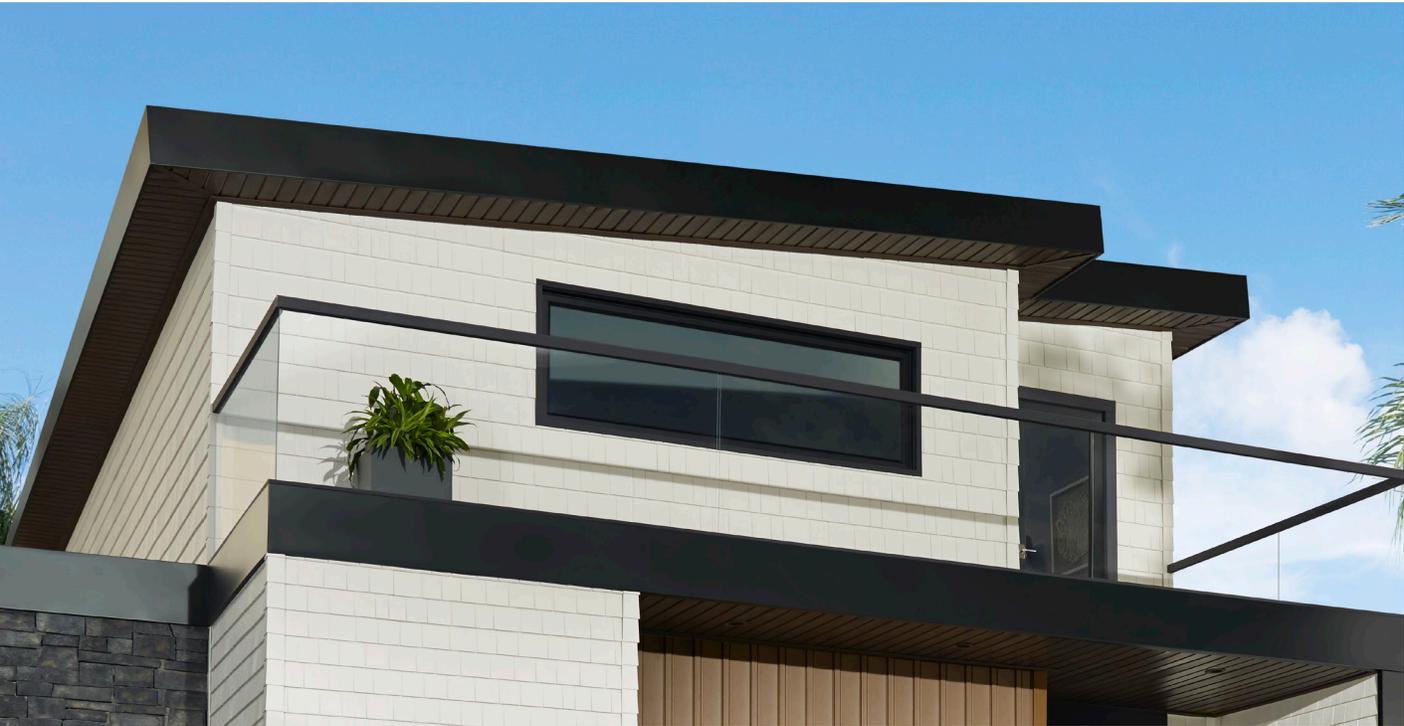

CEDAR DISCOVERY[®]
AUTHENTIC SHAKE & SHINGLE SIDING

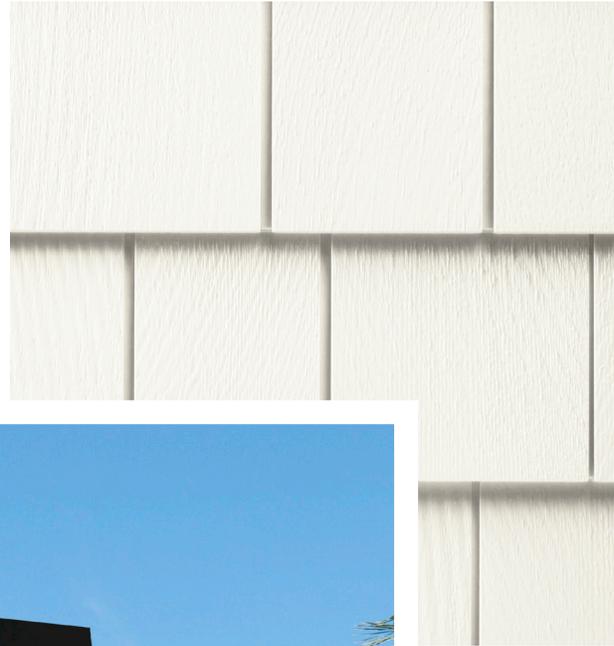



MAKE MORE POSSIBLE.

CEDAR DISCOVERY®

AUTHENTIC SHAKE & SHINGLE SIDING

5 FIVE POINT LOCKING SYSTEM

Ensures Ultimate Peace Of Mind

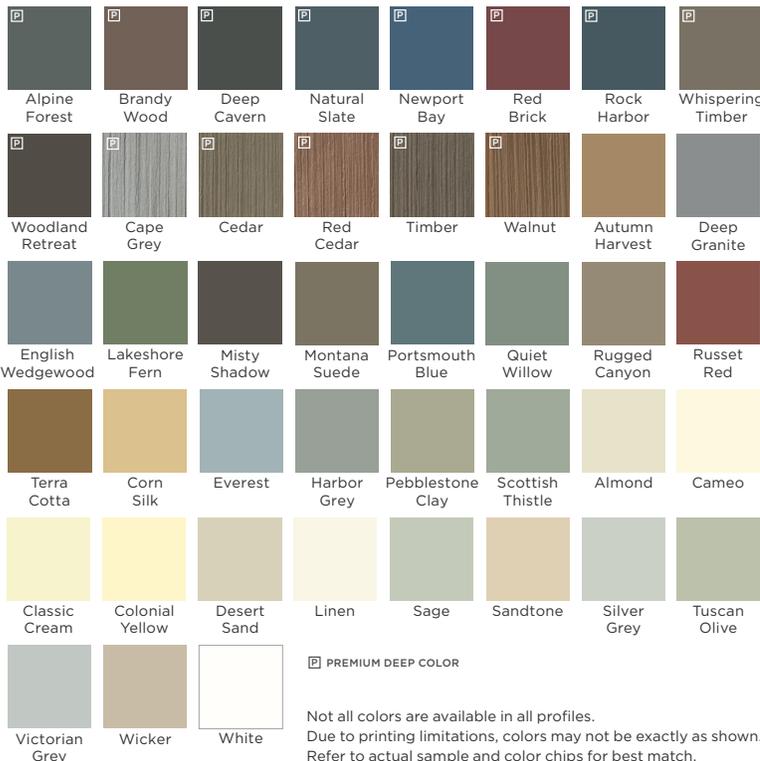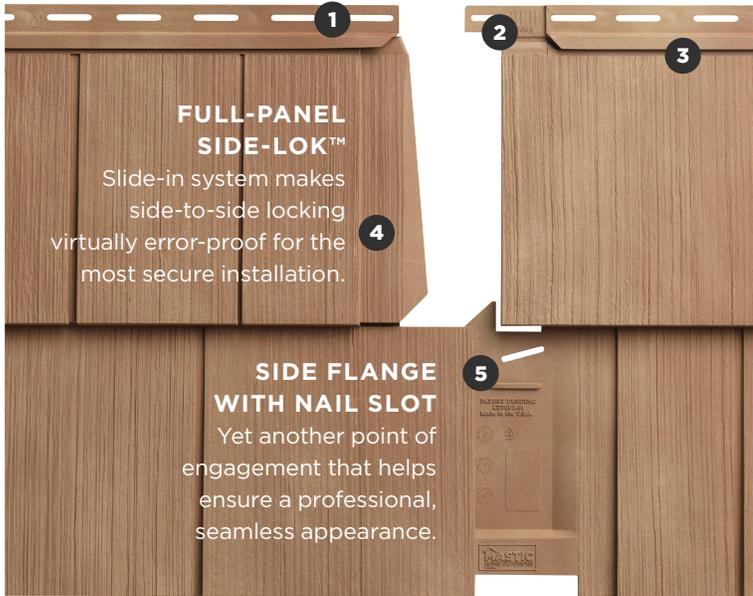

1. CONTINUOUS LOCKING SYSTEM

Our exclusive, continuous, snap-in locking system runs the entire length of the panel — and provides up to twice as much support as less reliable “tab-type” systems.



2. SURE POSITION LAPPING GAUGE™

Helps ensure perfect panel-to-panel alignment and lapping regardless of temperature extremes during installation.



3. SPEEDY, ACCURATE & SECURE INSTALLATION

Combined with our patented double-thick nail hem, this unbeatable combination provides greater stability and a stronger anchoring surface. The panel mounts securely to the wall, achieving maximum wind resistance.



WIND VELOCITY — RATED UP TO 218 MPH*

MIAMI-DADE COUNTY APPROVED

Standard Wind Load Design Pressure (DP) of 114 PSF and can resist a Wind Velocity of up to 218 mph. (Varies by panel – see specification guide for full detail.)



FLEX = EASIER INSTALLATION

Panels flex to ease installation in tight places — helps ensure a perfect fit and professional finish.



BREATHE EASY

Cutting does not produce harmful silica dust — silica dust can cause lung disease.



SUSTAINABLE

Crafted of readily available natural materials — our vinyl siding is safe, sustainable and recyclable



V.I.P. LIFETIME WARRANTY



CLASS 1(A) FIRE RATING

*Tested in accordance with ASTM D5206. Wind speed rating will vary depending on specific code region and construction method. Refer to local building codes for detailed requirements concerning allowable wind loads and specified conversion tables for actual wind speeds. Example wind velocity for 114 PSF is 218 MPH Zone B @ 30' building height.