

PRO SERIES

W I N D O W S




200 SLIDING WINDOW



LOOKS THAT LAST. STYLES THAT STAND OUT.

Style. Value. Dependability. When you're looking to make the most of your next project, count on Ply Gem Windows Pro Series. Our extensive product line provides you with the choices you want and the custom solutions you need. Designed with a deeper, full line frame, these windows are energy efficient, provide enhanced strength and stability and are virtually maintenance free. You'll not only enhance the view, you'll help bring a room to life.

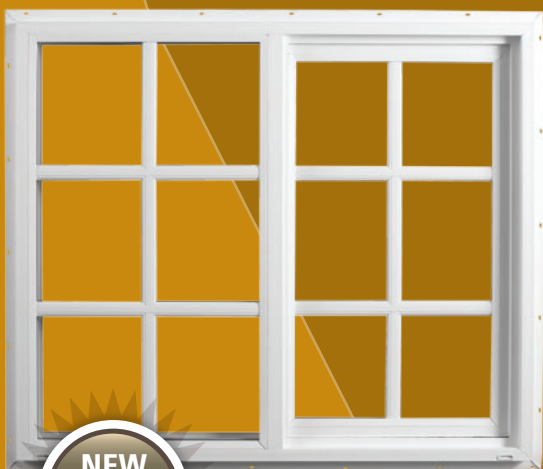

NEW
HP_{MAX}

Triple-Pane Option



200 SLIDING WINDOW



PLY GEM PRO SERIES 200 WINDOWS HAVE BEEN GREEN APPROVED BY THE HOME INNOVATIONS RESEARCH LAB.



Home Innovation
NCBS GREEN CERTIFIED™

This means you can be assured that Ply Gem Pro Series 200 windows comply with specific green practice criteria in the National Green Building Standard. Visit www.homeinnovation.com/greenproducts for more details.

THERMAL PERFORMANCE

	R Value	NFRC CERTIFIED		
		U Factor	SHGC	VT
WITH WARM EDGE				
3/4" Clear	2.04	0.49	0.60	0.64
3/4" HP	3.13	0.32	0.29	0.54
3/4" HP ^{SC}	3.13	0.32	0.22	0.43
1" HP ^{MAX}	4.17	0.24	0.25	0.42
WITH WARM EDGE+				
3/4" HP	3.33	0.30	0.29	0.54
3/4" HP ^{SC}	3.33	0.30	0.22	0.43

All units are NAMI certified and rated in accordance with NFRC 100/200 standards by an AAMA accredited lab. Performance values reflect the performance of units tested with the following configuration: 3mm glass, no grilles and IGU thickness as noted in chart.



R VALUE: Restrictive ambient air flow; U FACTOR: Rate of heat loss; SHGC: Solar Heat Gain Coefficient; VT: Visible Transmittance

STANDARD FEATURES

- Integral nail fin for easy, accurate installation
- Low-point, high-pressure weep system helps water drain efficiently from frame
- Wide brass adjustable rollers for smooth operation
- Limited sash stop and removable sash
- Continuous weatherstripping and dual cam-action sash lock provides security while sealing out the weather and sealing in your comfort
- Energy-efficient warm edge insulating glass for enhanced energy performance
- Corrosion-resistant stainless steel screws and hardware for lifelong durability
- Aluminum-reinforced meeting rail for added strength and durability
- Maintenance-free multi-chamber PVC construction with fusion welded corners for durability, weather-tight performance and beauty
- 3 7/16" frame depth with heavy vinyl walls for strength and stability
- Rated for light commercial application



OPTIONS

GLASS OPTIONS:

HP, HP^{SC}, HP^{MAX}, Warm Edge+, STC options, tints, obscure, laminated, tempered, single glaze



GRILLE OPTIONS:

Color-coordinated grilles-between-the-glass (GBG) in flat 5/8", sculptured 5/8" or 1" styles; simulated-divided-lite (SDL) 7/8" or 1 1/4" styles; 2" accent bar



HARDWARE OPTIONS:

AUTOLOCK—positive action lock



FRAME OPTIONS:

1" or 1 3/8" nail fin setback with stucco key or J-channel, dual wall flush fin, no fin; Insulair passive fresh air ventilation system

COLOR OPTIONS:



NOTE: Colors shown are close approximations and may not be accurate representations for color matching. Please request color swatches from your Ply Gem sales representative to do so.

1. Most units are rated DP25 standard.
2. Low-E with argon.
3. Optional Solar Cooling optimized Low-E with argon.
4. Optional triple pane, combining two panes of Low-E insulating glass with an interior glass substrate creating two chambers of argon gas fill for superior performance.
5. Optional Sound Control.
6. Optional Warm Edge+ spacer on dual pane units for enhanced performance.

NOTE: Optional 1" IGU for 1" sculptured GBG and some Sound Control Glass packages. 1" sculptured GBG available with HP^{MAX}, excluding bent grille patterns.