

PRO SERIES

W I N D O W S

 **PLY GEM**
WINDOWS




960 SLIDING PATIO DOOR



LOOKS THAT LAST. STYLES THAT STAND OUT.

Style. Value. Dependability. When you're looking to make the most of your next project, count on Ply Gem Windows Pro Series. Our extensive product line provides you with the choices you want and the custom solutions you need. Designed with a deeper, full line frame, these doors are energy efficient, provide enhanced strength and stability and are virtually maintenance-free. You'll not only enhance the view, you'll help bring a room to life.

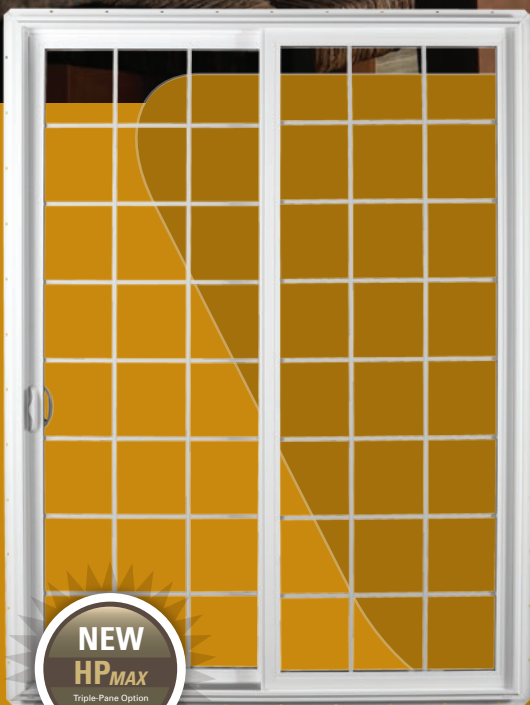

NEW
HP^{MAX}

Triple-Pane Option



960 SLIDING PATIO DOOR



Home Innovation
NGBS GREEN CERTIFIED™

PLY GEM PRO SERIES 960 SLIDING PATIO DOORS HAVE BEEN GREEN APPROVED BY THE HOME INNOVATIONS RESEARCH LAB.

This means you can be assured that Ply Gem Pro Series 960 sliding patio doors comply with specific green practice criteria in the National Green Building Standard. Visit www.homeinnovation.com/greenproducts for more details.

THERMAL PERFORMANCE

	R Value	NFRC CERTIFIED		
		U Factor	SHGC	VT
WITH WARM EDGE				
3/4" Clear	2.13	0.47	0.61	0.64
3/4" HP	3.33	0.30	0.28	0.54
3/4" HP ^{SC}	3.33	0.30	0.22	0.42
1" HP ^{MAX}	3.70	0.27	0.21	0.35
WITH WARM EDGE+				
3/4" HP	3.45	0.29	0.28	0.54
3/4" HP ^{SC}	3.45	0.29	0.22	0.42

All units tested in accordance with ASTM standards; rated in accordance with International Residential Code; and witnessed by an independent NAMI accredited lab. Performance values reflect the performance of units tested with the following configuration: 3/4" IGU, 3mm glass and no grilles.



R VALUE: Restrictive ambient air flow; U FACTOR: Rate of heat loss; SHGC: Solar Heat Gain Coefficient; VT: Visible Transmittance

STANDARD FEATURES

- Integral pre-punched nailing fin facilitates easy and accurate installation
- Maintenance-free multi-chamber New Generation PVC vinyl construction with fusion welded corners for durability, weather-tight performance and beauty
- Smooth gliding stainless steel rollers provide long lasting durability
- Two-point lock with adjustable strikes is standard on 2-panel and 3-panel doors and four-point lock is standard on 4-panel doors
- Energy-efficient warm edge insulating tempered glass for enhanced energy performance
- Shoot-bolt in 4-panel doors for added security
- 4 3/8" frame depth with heavy vinyl walls for strength and stability
- Anodized aluminum threshold cover



OPTIONS

GLASS OPTIONS:

HP, HP^{SC}, HP^{MAX}, Warm Edge+, STC options, tints, obscure, laminated, wire, single glaze



GRILLE OPTIONS:

Color-coordinated grilles-between-the-glass (GBG) in flat 5/8", sculptured 5/8" or 1" styles; simulated-divided-lite (SDL) in 7/8" or 1 1/4" styles; 2" accent bar



HARDWARE OPTIONS:

Exterior: white or sand; *Interior:* white, sand, polished brass, antique brass, satin nickel, oil rubbed bronze or polished chrome



FRAME OPTIONS:

1 3/8" nail fin setback with stucco key or J-channel, dual wall flush fin or no fin

COLOR OPTIONS:



NOTE: Colors shown are close approximations and may not be accurate representations for color matching. Please request color swatches from your Ply Gem sales representative to do so.

1. Most units rated DP40 standard.
2. Low-E with argon.
3. Optional Solar Cooling optimized Low-E with argon.
4. Optional triple pane, combining two panes of Low-E insulating glass with an interior glass substrate creating two chambers of argon gas fill for superior performance.
5. Optional Sound Control.
6. Optional Warm Edge+ spacer on dual pane units for enhanced performance.