

PRO SERIES

W I N D O W S

PlyGem[®]
WINDOWS & DOORS




960 SLIDING PATIO DOOR

VINYL

LOOKS THAT LAST. STYLES THAT STAND OUT.

Style. Value. Dependability. When you're looking to make the most of your next project, count on Ply Gem Windows & Doors Pro Series. Our extensive product line provides you with the choices you want and the custom solutions you need. Designed with a deeper, full line frame, these doors are energy efficient, provide enhanced strength and stability and are virtually maintenance-free. You'll not only enhance the view, you'll help bring a room to life.

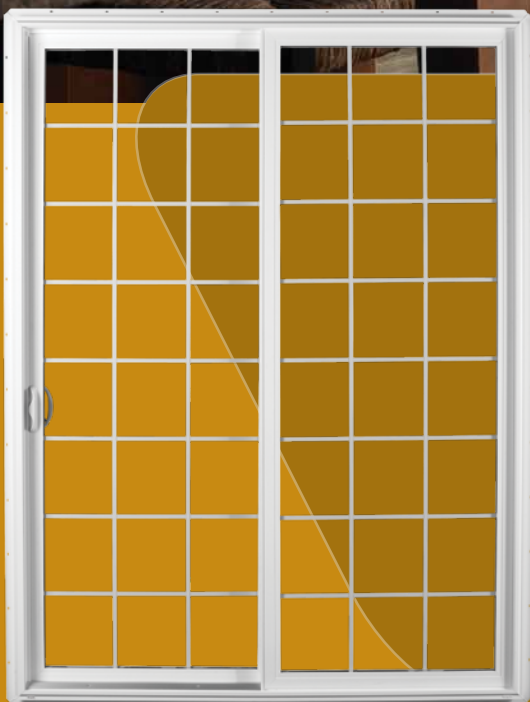



960 SLIDING PATIO DOOR



STANDARD FEATURES

- 1-3/8" nail fin setback with and without stucco key for easy and accurate installation
- Maintenance-free multi-chamber New Generation PVC vinyl construction with fusion welded corners for durability, weather-tight performance and beauty
- Smooth cad/zinc rollers for easy operation
- Two-point lock with adjustable strikes is standard on 2-panel, 3-panel and 4-panel doors
- Energy-efficient warm edge insulating tempered glass for enhanced energy performance
- Shoot-bolt in 4-panel doors for added security
- 4-3/8" frame depth with heavy vinyl walls for strength and stability
- Anodized aluminum threshold cover



OPTIONS



GLASS OPTIONS:

HP, HP^{SC}, HP^{MAX}, Warm Edge+, STC options, tints, obscure, laminated, wire, single glaze

GRILLE OPTIONS:

Color-coordinated grilles-between-the-glass (GBG) in flat 5/8", sculptured 5/8" or 1" styles; simulated-divided-lite (SDL) in 7/8" or 1-1/4" styles; 2" accent bar

HARDWARE OPTIONS:

Exterior: white or sand; *Interior:* white, sand, polished brass, antique brass, satin nickel, oil rubbed bronze or polished chrome

FRAME OPTIONS:

1-3/8" nail fin setback with stucco key or J-channel, dual wall flush fin or no fin

COLOR OPTIONS:



PAINTED EXTERIOR COLORS:

Geographically limited availability



THERMAL PERFORMANCE

	R Value	NFRC CERTIFIED		
		U Factor	SHGC	VT
WITH WARM EDGE				
3/4" Clear	2.13	0.47	0.61	0.64
3/4" HP	3.33	0.30	0.28	0.54
3/4" HP ^{SC}	3.33	0.30	0.22	0.42
1" HP ^{MAX}	3.70	0.27	0.21	0.35
WITH WARM EDGE+				
3/4" HP	3.45	0.29	0.28	0.54
3/4" HP ^{SC}	3.45	0.29	0.22	0.42

All units tested in accordance with ASTM standards; rated in accordance with International Residential Code; and witnessed by an independent NAMI accredited lab. Performance values reflect the performance of units tested with the following configuration: 3/4" IGU, 3mm glass and no grilles.



R VALUE: Restrictive ambient air flow; U FACTOR: Rate of heat loss; SHGC: Solar Heat Gain Coefficient; VT: Visible Transmittance

NOTE: Colors are reproduced as accurately as printer technology allows. Please see your authorized Ply Gem Windows representative for actual samples.

1. Most units rated DP40 standard
2. Low-E with argon
3. Optional Solar Cooling optimized Low-E with argon
4. Optional triple pane, combining two panes of Low-E insulating glass with an interior glass substrate creating two chambers of argon gas fill for superior performance
5. Optional Sound Control
6. Optional Warm Edge+ spacer on dual pane units for enhanced performance

