


BUILDER SERIES

W I N D O W S



4880 POCKET & BYPASS SLIDING PATIO DOOR

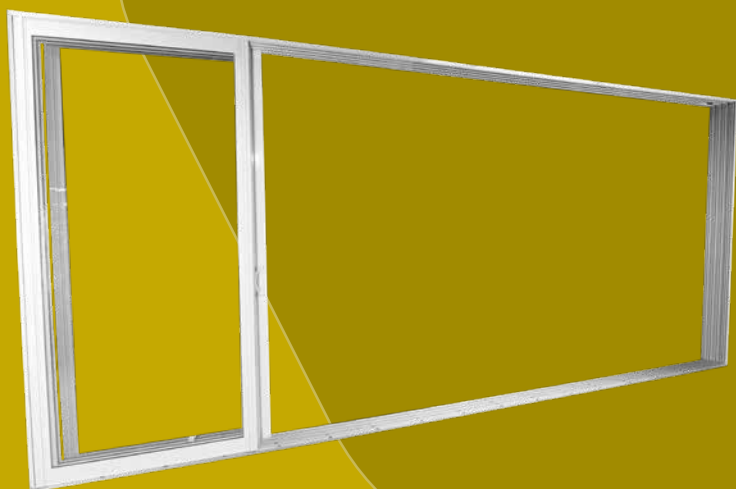


ELEGANCE AND VALUE.

Our Builder Series 4880 Sliding Door provides an elegant glass wall when closed, and opens up to 16' wide to maximize your home's transitional living, allowing more indoor/outdoor living options. This affordable thermally-enhanced aluminum pocket door and bypass door is ideal for homes in southern and southwest markets.



4880 POCKET SLIDING PATIO DOOR

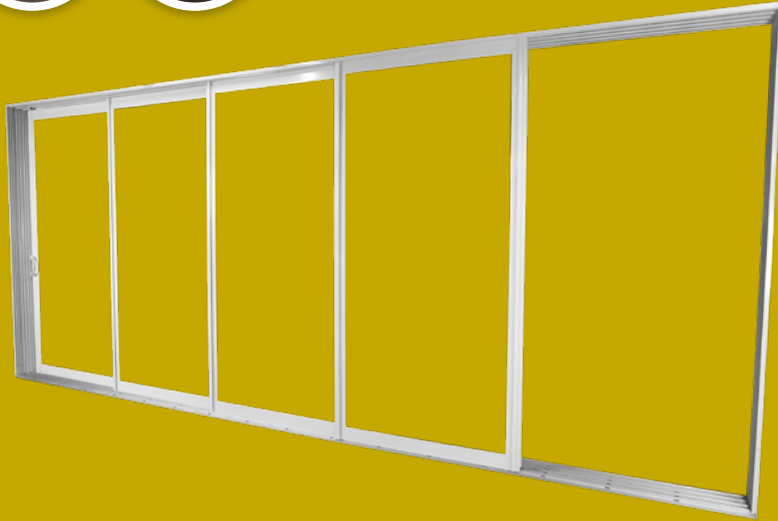

STANDARD FEATURES

- Virtually maintenance-free extruded aluminum thermally-broken construction with electrostatically applied finish
- Available in standard and custom sizes up to 16' x 8'
- Knockdown frame standard with individually packaged panels for ease of handling
- Standard panel widths 2-6, 3-0 or 4-0
- Standard energy-efficient Warm Edge spacer or optional Warm Edge Plus spacer
- Mortise lockset – stylish, functional and adjustable
- Adjustable tandem rollers for a more effortless operation and fine-tuning the fit and operation



OPTIONS

GLASS OPTIONS:

Low-E, Low-ESC, Low-E2+, Low-ESC2+, HP, HPSC, HP2+, HPSC2+

GRILLE OPTIONS:

Color-coordinated grilles-between-the-glass (GBG) in 5/8" and 3/4" flat

PRODUCT CONFIGURATION:

Pocket doors can be configured with one, two, three, or four panels—all operating. Bypass doors can be configured with two, three or four panels for multi-slide configurations.

Independent framing required for side lites, transoms, segmented transoms and a wide selection of architectural shapes.

COLOR OPTIONS:



NOTE: Colors shown are close approximations and may not be accurate representations for color matching.

Texas Department of Insurance TDI Dr-621
Florida Building Commission FL-15943



THERMAL PERFORMANCE

	R Value	NFRC CERTIFIED		
		U Factor	SHGC	VT
WARM EDGE				
3/4" IGU Clear	1.67	0.60	0.61	0.62
3/4" IGU Low E	2.13	0.47	0.29	0.53
3/4" IGU Low ESC	2.17	0.46	0.23	0.53
3/4" IGU Low E 2+	2.38	0.42	0.28	0.51
3/4" IGU Low ESC 2+	2.38	0.42	0.22	0.40
3/4" IGU HP	2.33	0.43	0.29	0.53
3/4" IGU HPSC	2.33	0.43	0.22	0.42
3/4" IGU HP 2+	2.50	0.40	0.28	0.51
3/4" IGU HPSC 2+	2.56	0.39	0.21	0.40
WARM EDGE+				
3/4" IGU Low E	2.17	0.46	0.29	0.53
3/4" IGU Low ESC	2.17	0.46	0.23	0.42
3/4" IGU Low E 2+	2.38	0.42	0.28	0.51
3/4" IGU Low ESC 2+	2.38	0.42	0.23	0.40
3/4" IGU HP	2.33	0.43	0.29	0.53
3/4" IGU HPSC	2.33	0.43	0.22	0.42
3/4" IGU HP 2+	2.56	0.39	0.28	0.51
3/4" IGU HPSC 2+	2.56	0.39	0.21	0.40

All units are NAMI certified and rated in accordance with NFRC 100/200 standards by an AAMA accredited lab. Performance values reflect the performance of units tested with the following configuration: 3/4" IGU, 3mm glass and no grilles.

R VALUE: Restrictive ambient air flow; U FACTOR: Rate of heat loss; SHGC: Solar Heat Gain Coefficient; VT: Visible Transmittance

1. Optional Low-E and Low-ESC (solar cooling) glass options.
2. Optional HP and HPSC (solar cooling) Glass packages combine Low-E glass options with argon gas fill for high performance.
3. HP2+ and HPSC2+ glass packages combine 2 surfaces of Low-E glass and argon for high performance.
4. Meets Florida building codes for certain zones. Consult your local codes for specific requirements.

