

BUILDER SERIES

W I N D O W S




1120 SERIES SLIDING WINDOW



**MORE VALUE. MORE PERFORMANCE.
MORE SOLUTIONS.**

If you're looking for a window that delivers the best possible performance at the best possible value, look no further than Ply Gem Windows Builder Series. It's energy-efficient and offers a variety of material choices, most of which are virtually maintenance-free and can withstand the toughest tests, including the test of time. Plus, with our service and support you'll be able to get the job done the right way on time and on budget.

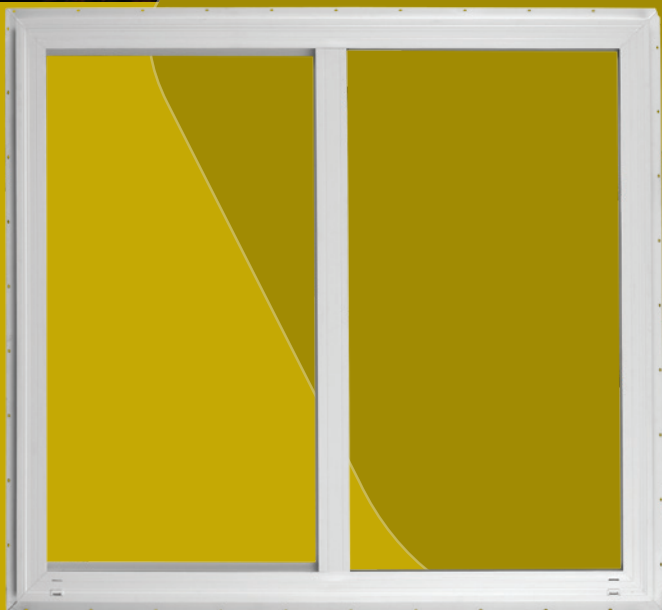

plygem.com/windows





1120 SERIES SLIDING WINDOW



PERFORMANCE GRADE

Overall Rating	Test Unit Size
R - PG15	72" x 72"

1120/30 SERIES SLIDING WINDOW

3mm Glass	NFRG CERTIFIED			
	R Value	U Factor	SHGC	VT
WITH WARM EDGE				
3/4" Low-E	2.94	0.34	0.29	0.55
3/4" Low-E ^{SC}	2.94	0.34	0.23	0.43
3/4" Low-E2+	3.33	0.30	0.28	0.53
3/4" Low-E2+ ^{SC}	3.45	0.29	0.22	0.42
WITH WARM EDGE+				
3/4" HP Glass	3.33	0.30	0.29	0.55
3/4" HP ^{SC} Glass	3.33	0.30	0.22	0.43
3/4" HP2+ Glass	3.85	0.26	0.28	0.53
3/4" HP2+ ^{SC} Glass	3.85	0.26	0.21	0.42

All units are NAMI certified and rated in accordance with NFRG 100/200 standards by an AAMA accredited lab. Performance values reflect the performance of units tested with the following configuration: 3/4" IGU, 3mm glass and no grilles.

R VALUE: Restrictive ambient air flow; U FACTOR: Rate of heat loss; SHGC: Solar Heat Gain Coefficient; VT: Visible Transmittance

STANDARD FEATURES

- Energy-efficient Warm Edge insulating glass
- Maintenance-free multi-chamber PVC construction
- Fully fusion-welded corners on sash and frame for superior structural strength
- Integral nail fin for simple installation
- Traditional brick mould profile with 2-3/4" frame depth
- Interior glazed fixed sash
- Removable exterior glazed operating sash
- Dual pull rails and tandem brass rollers for easy operation
- Aluminum reinforced meeting rail with cam locks that engage keepers for your security



OPTIONS

GLASS OPTIONS:

Low-E, Low-E^{SC}, Low-E2+, Low-E2+^{SC}, HP, HP^{SC}, HP2+, HP2+^{SC}, Warm Edge+ spacer, obscure and tempered

GRILLE OPTIONS:

Color-coordinated grilles-between-the-glass (GBG) in 5/8" and 3/4" flat

FRAME OPTIONS:

4-9/16" or 6-9/16" primed jamb extensions for 1-3/8" setback.

PRODUCT CONFIGURATION:

Two sash and a three sash configuration

SOUND CONTROL OPTIONS:

STC 25, 28, or 32

COLOR OPTIONS:



NOTE: Colors shown are close approximations and may not be accurate representations for color matching. Please request color swatches from your Ply Gem sales representative to do so.