


MASTIC[®]
by  **Ply Gem**

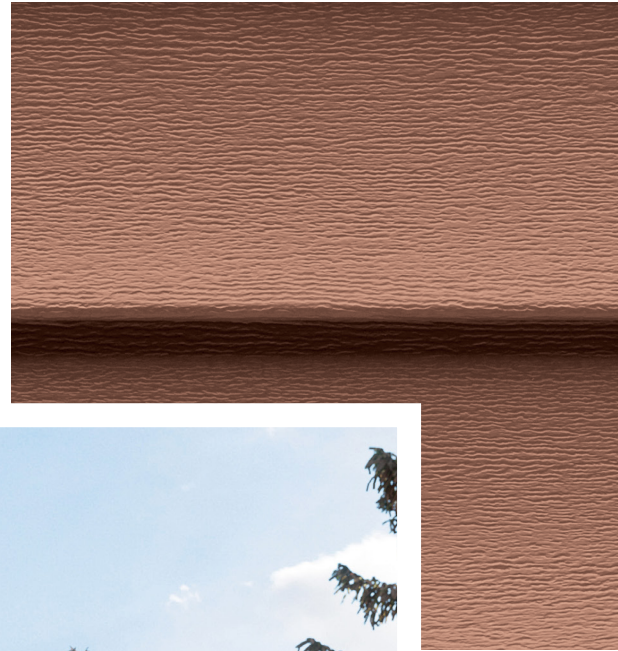

OVATION[™]
VINYL SIDING

MAKE MORE POSSIBLE.


OVATION™

VINYL SIDING



OUR MOST LUXURIOUS COLORS FEATURE SOLARDEFENSE REFLECTIVE TECHNOLOGY™

Whatever architectural style you prefer will be enhanced with lap siding in deep, rich luxurious colors. And with SolarDefense Reflective Technology, you don't have to worry about fading or distortion because each board is engineered to resist the sun's harshest UV rays. So go ahead, splurge on one of these deep hues you've always wanted, knowing they'll stay looking fresh and dreamy for years to come.

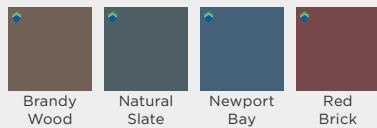

SOLARDEFENSE REFLECTIVE TECHNOLOGY

PREMIUM DEEP COLOR

Not all colors are available in all profiles.
Due to printing limitations, colors may not be exactly as shown.
Refer to actual sample and color chips for best match.



.042" NOMINAL THICKNESS

Superior thickness and impact resistance.



WIND VELOCITY

— RATED UP TO 129 MPH*

MIAMI-DADE COUNTY APPROVED

Standard Wind Load Design Pressure (DP) of up to 40 PSF & wind velocity rated up to 129 MPH.*



SNAP+LOCK+HOLD™

LOCKING SYSTEM*

Grips tight so panels lock securely and stay put — even in high winds.



ROLLOVER, REINFORCED NAIL HEM

Easier installation — more precise and secure fastening.



9/16" PANEL PROJECTION

Enhanced shadow lines replicate the appearance of real wood panels.



HANG-TOUGH™ TECHNOLOGY

Boosts durability so panels are more resistant to cracking, impact and thermal distortion.



DURANYL® 5000 PROTECTION SYSTEM

Protects our premium colors against harsh elements and maximizes long-term weatherability.



BREATHE EASY

Cutting does not produce harmful silica dust which can cause lung disease.



SUSTAINABLE

Crafted of readily available natural materials — our vinyl siding is safe, sustainable and recyclable.



CLASS 1(A) FIRE RATING

*Tested in accordance with ASTM D5206. Wind speed rating will vary depending on specific code region and construction method. Refer to local building codes for detailed requirements concerning allowable wind loads and specified conversion tables for actual wind speeds. Example wind velocity for 40 PSF is 129 MPH Zone B @ 30' building height.

MASTIC.COM | 800-962-6973
5020 Weston Parkway, Cary, NC 27513

© 2025 Mastic Home Exteriors Inc, part of Cornerstone Building Brands, Inc.
ALL RIGHTS RESERVED. 7610094211101/RevE/MS/IMG/0225



PART OF THE CORNERSTONE BUILDING BRANDS FAMILY | SIDING | WINDOWS + DOORS | SHUTTERS | METAL, TRIM + ACCESSORIES | STONE VENEER | FENCE + RAILING